


## Swing Door | Fixed









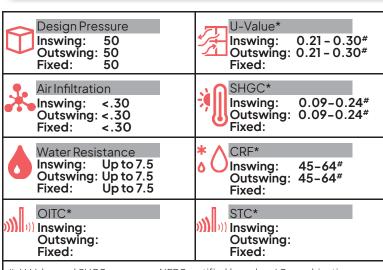


#- U-Value and SHGC ranges are NFRC certified based on I.G. combinations incorporating some or all the following: Low-E glass, clear glass, argon gas and/or air fill, and grids
\*-Contact Quaker for STC & OITC information


## **FEATURES:**


- ► Extruded, architectural grade uPVC vinyl frame
- 1" insulating glass
- ► Inswing or Outswing single-panel operation
- ► Standard Widths: 28, 30, 32
- ► Standard heights: 68, 610, 80
- Max sizing: 48" x 96"
- Minimum sizing: 32" x 72"
- 2 5%" threshold. Optional ADA threshold w/10" bottom rail
- ► Multi-point WHS hardware
- Butt hinges 3 axis adjustability
- Keyed hardware option
- White or Sandstone uPVC vinyl
- Optional painted exterior (meets FGIA 615 finish)
- Textured laminate options for exterior and interior
- ► Fixed Transom and Sidelite




## V300 COMMERCIAL VINYL SERIES




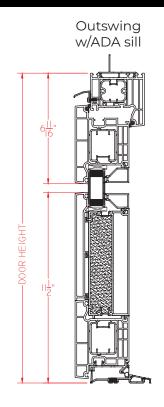

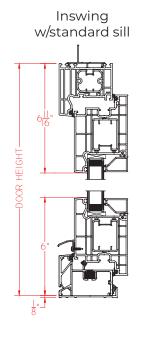


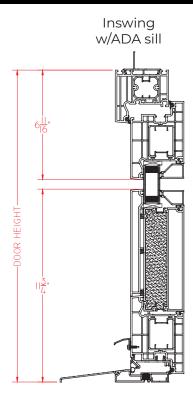

Outswing Models (horizontal cross section)

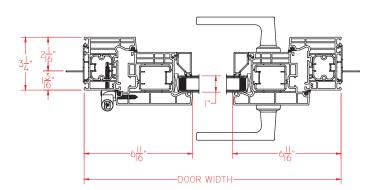

Inswing Models (horizontal cross section)

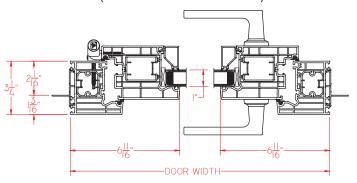



QuakerCommercialWindows.com 1-800-347-0438 Commercial@quakerwindows.com